

KombiSIGN 71 / Flash Beacon 643

Flashing light element 12VDC RD



| | |
|-----------|--------------|
| Part No.: | 643.100.54 |
| Series: | KombiSIGN 71 |



| MECHANICAL DATA | |
|-----------------------------|-------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Red |
| Protection category | IP65 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 88 g |
| Product weight | 76 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 12V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 12 VDC |
| Rated operational current | 195 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

| OPTICAL DATA | |
|----------------------|---------------------------|
| Light source | Xenon |
| Light colour | Red |
| Optical signal image | Flash |
| Flash frequency | 1 Hz |
| Flash output | 2 J |
| Service life optical | 4 million flashes minimum |

| APPROVAL DATA | |
|------------------------------|---------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Flash Beacon 643

Flashing light element 12VDC RD

| | |
|-------------------------------|-----------------------|
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

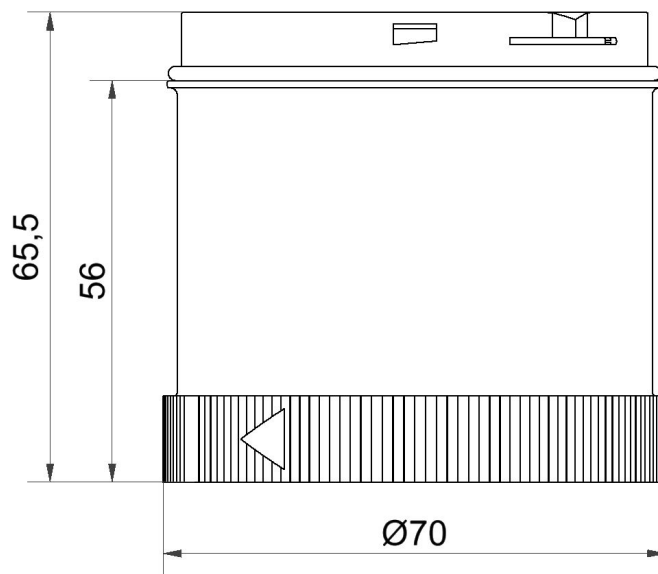

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.