

KombiSIGN 70 / LED Flashing Element 843
LED Flashing light el. 24VDC RD



| | |
|-----------|--------------|
| Part No.: | 843.120.55 |
| Series: | KombiSIGN 70 |



| MECHANICAL DATA | |
|-----------------------------|------------------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Red |
| Protection category | IP54 |
| Service life optical | 50,000 h maximum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 96 g |
| Product weight | 81 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 35 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

| OPTICAL DATA | |
|----------------------|-------|
| Light source | LED |
| Light colour | Red |
| Optical signal image | Flash |
| Flash frequency | 1 Hz |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / LED Flashing Element 843

LED Flashing light el. 24VDC RD

DRAWING

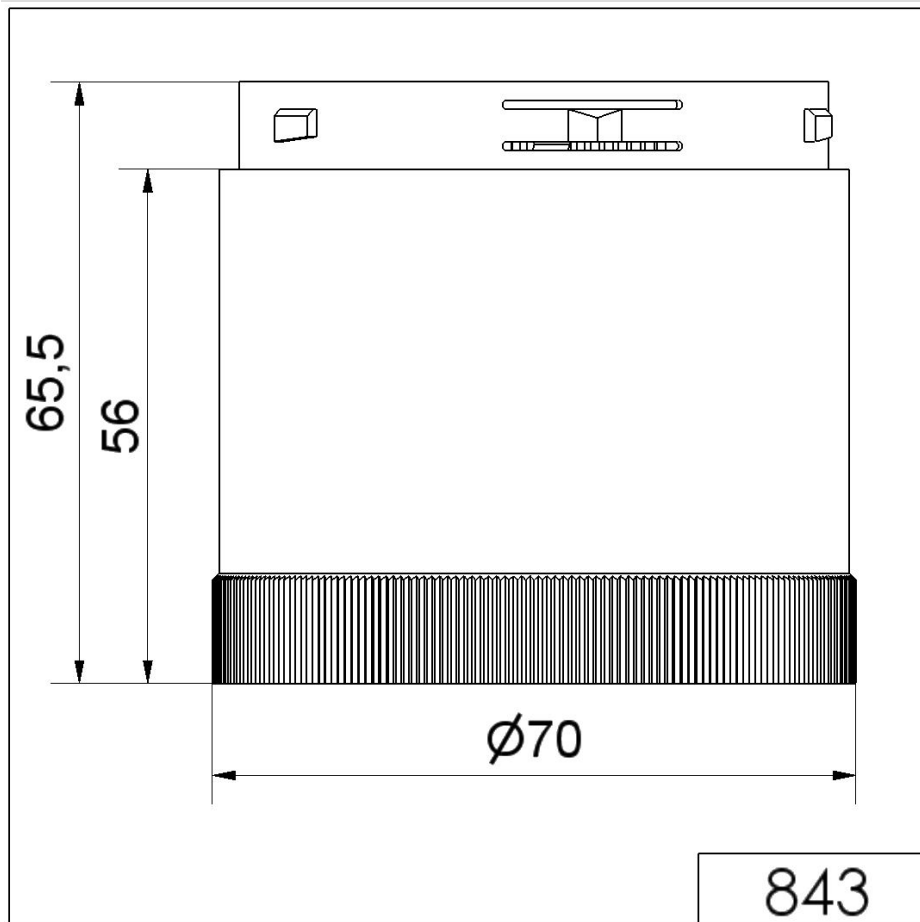

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.