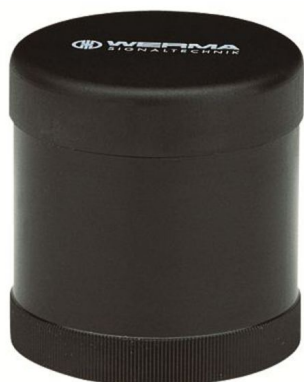


KombiSIGN 70 / Audible Devices 844

Buzzer element contin/pulse 230VAC BK

| | |
|-----------|--------------|
| Part No.: | 844.118.68 |
| Series: | KombiSIGN 70 |

**MECHANICAL DATA**

| | |
|-----------------------------|-----------------|
| Height | 72 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP54 |
| Service life optical | 5,000 h minimum |
| Acoustic service life | 5,000 h minimum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 99 g |
| Product weight | 85 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------------|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage type | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 35 mA |
| Rated inrush current | 450 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

ACUSTICAL DATA

| | |
|-------------------------------|-------------------------------|
| Volume/dB(max) at 1m distance | 85,0 dB dB(A) |
| Acoustic signal image | Continuous tone Pulse tone |
| Audio frequency | 1750 Hz |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Audible Devices 844

Buzzer element contin/pulse 230VAC BK

DRAWING

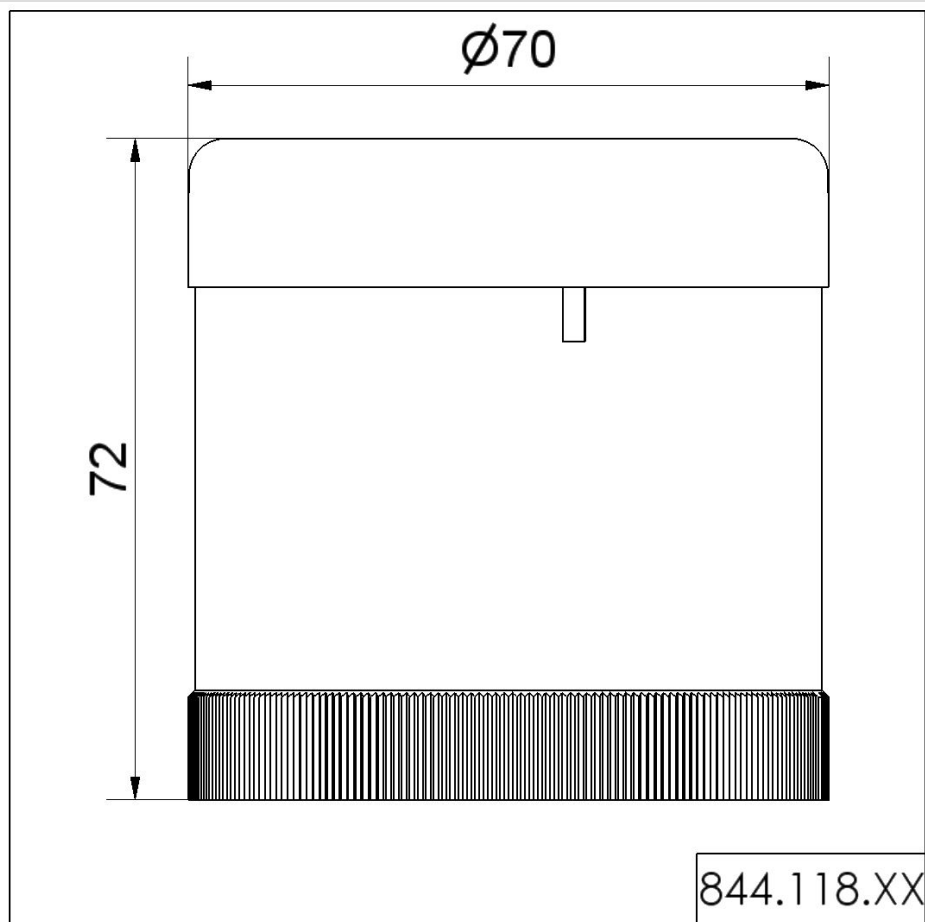

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.