

KombiSIGN 50 / LED Blinking Beacon 848

LED Blinking light element 115VAC RD



Part No.:	848.110.67
Series:	KombiSIGN 50



MECHANICAL DATA	
Height	67 mm
Diameter	52 mm
Materials	PC
Dome colour	Red
Protection category	IP54
Service life optical	100,000 h maximum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	54 g
Product weight	43.2 g

ELECTRICAL DATA	
Operating voltage	115V
Operating voltage type	AC
Operating voltage type	60Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	115 VAC
Rated operational current	25 mA
Rated inrush current	1.000 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V


OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Blink
Blink frequency (Hz)	1 Hz

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / LED Blinking Beacon 848

LED Blinking light element 115VAC RD

DRAWING

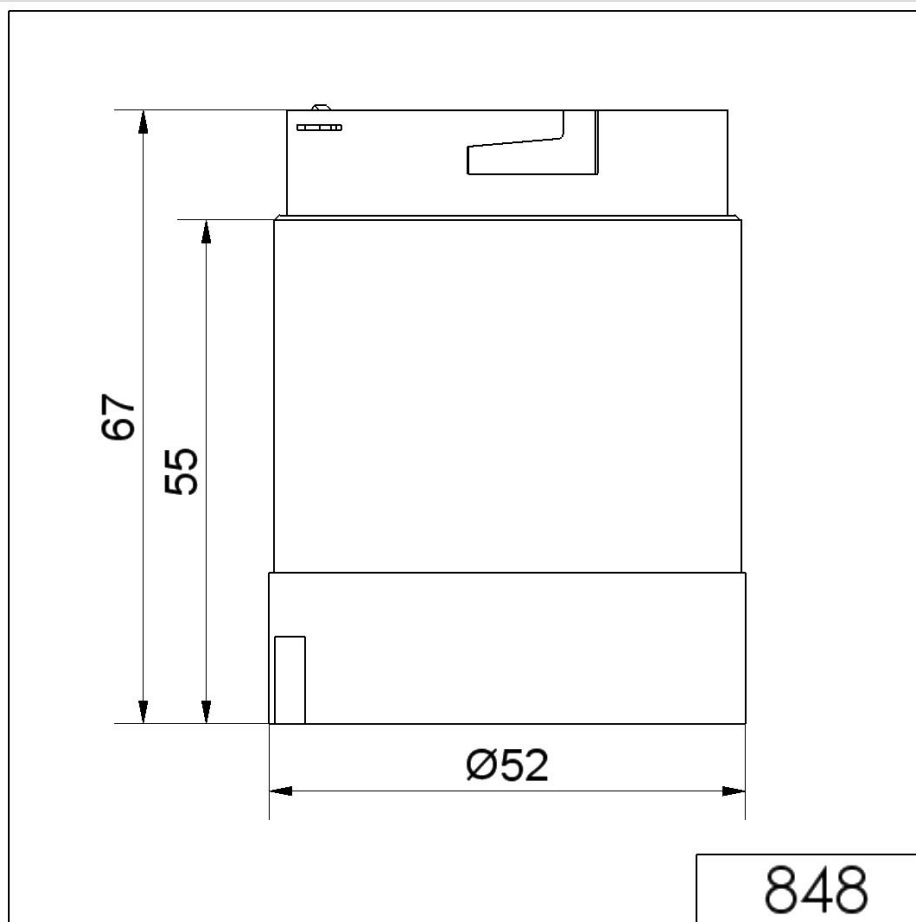

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.