

KombiSIGN 50 / Buzzer Devices 849

Buzzer element contin/pulse 230VAC BK

Part No.:	849.000.68
Series:	KombiSIGN 50

**MECHANICAL DATA**

Height	72 mm
Diameter	52 mm
Materials	PC
Housing colour	Black
Protection category	IP54
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12
Weight with packaging	64.1 g
Product weight	53.5 g

ELECTRICAL DATA

Operating voltage	230V
Operating voltage type	AC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	35 mA
Rated inrush current	450 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

ACUSTICAL DATA

Volume/dB(max) at 1m distance	85,0 dB dB(A)
Acoustic signal image	Continuous tone Pulse tone
Audio frequency	2500 Hz




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / Buzzer Devices 849

Buzzer element contin/pulse 230VAC BK

DRAWING

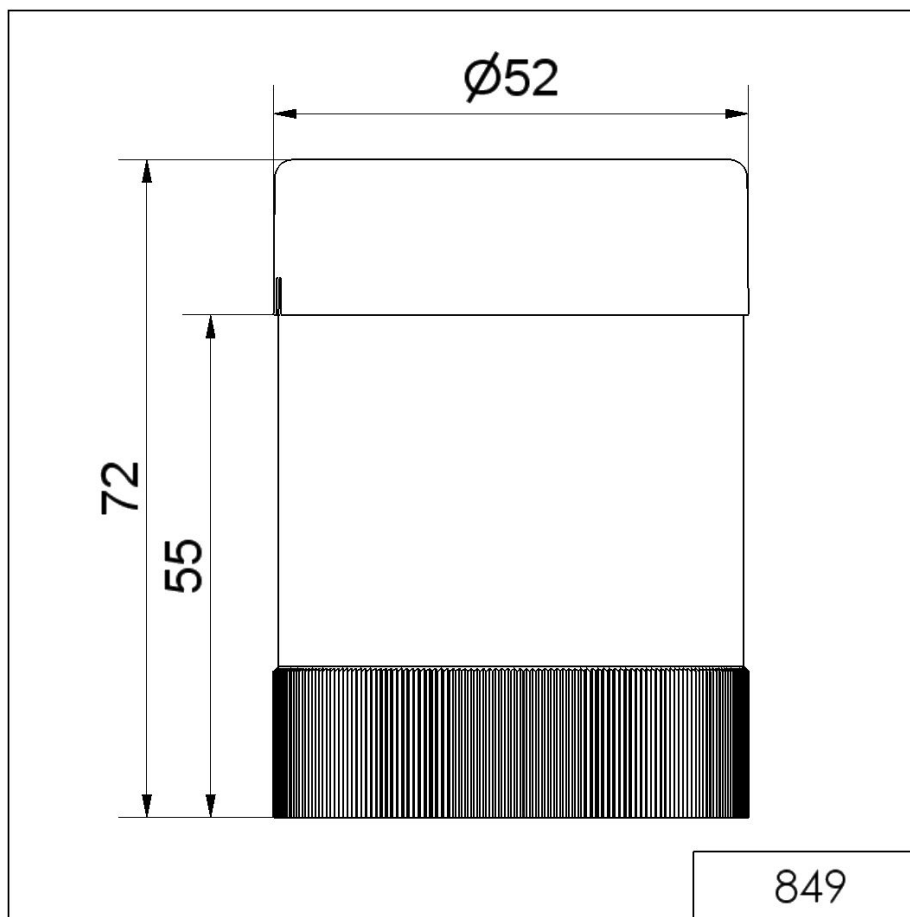

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.