

Midi Horns and Sirens / Electronic Siren 123

Electr. Siren WM alternating 24VDC BK

Part No.: 123.200.55

**MECHANICAL DATA**

Length	67 mm
Width	54 mm
Height	67 mm
Diameter	54 mm
Materials	ABS
Housing colour	Black
Protection category	IP54
Connection	Cable
cross-sectional area maximum	0,50mm ² / 20AWG
Type of fixing	Wall mounting
Service life optical	1,000 h minimum
Acoustic service life	1,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+70°C
Weight with packaging	97 g
Product weight	81 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	100 mA
Rated inrush current	3.000 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

ACUSTICAL DATA

Volume/dB(max) at 1m distance	105,0 dB dB(A)
Acoustic signal image	Alternating tone




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / Electronic Siren 123

Electr. Siren WM alternating 24VDC BK

DRAWING

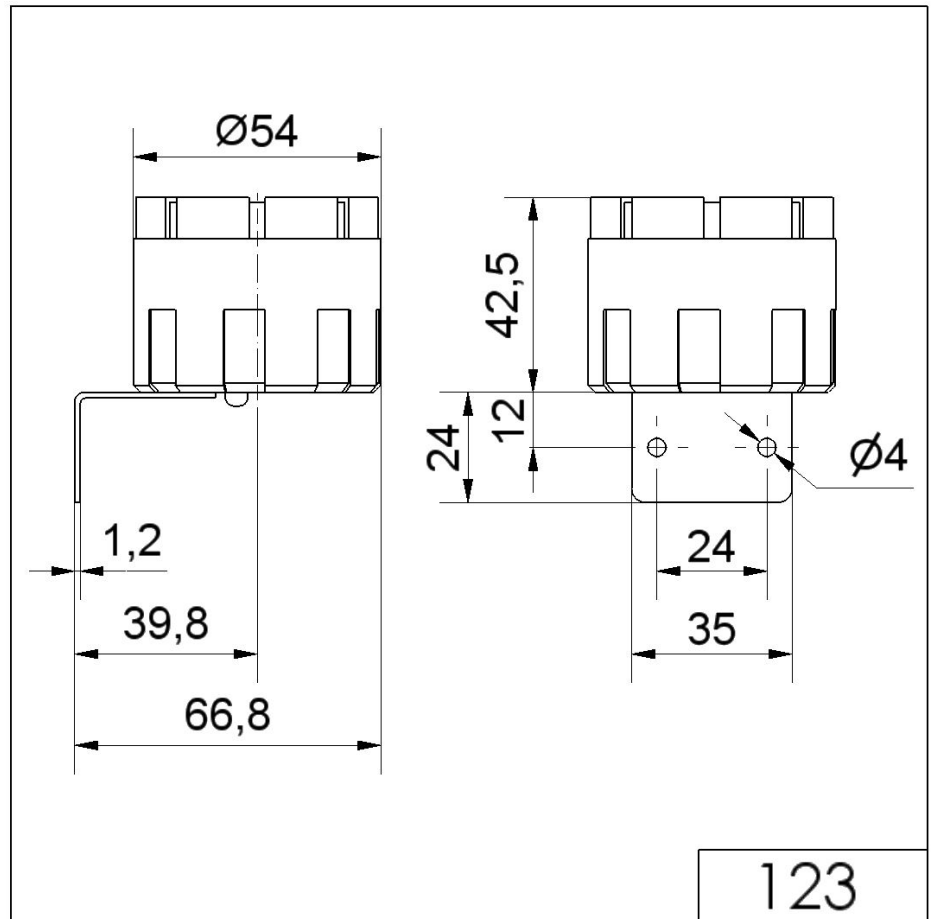

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.