

Midi Horns and Sirens / EvoSIGNAL  
**Midi Sounder 115-230VAC GY**



|                  |                       |
|------------------|-----------------------|
| <b>Part No.:</b> | <b>161.700.60</b>     |
| <b>Series:</b>   | <b>EvoSIGNAL Midi</b> |




| MECHANICAL DATA              |                             |
|------------------------------|-----------------------------|
| Height                       | 78 mm                       |
| Diameter                     | 85 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Acoustic service life        | 5,000 h minimum             |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| Weight with packaging        | 177 g                       |
| Product weight               | 137 g                       |

| ELECTRICAL DATA             |                              |
|-----------------------------|------------------------------|
| Operating voltage           | 115-230V                     |
| Operating voltage type      | AC                           |
| Operating voltage type      | 50Hz at 230V<br>60Hz at 115V |
| Operating voltage tolerance | +/- 10%                      |
| Rated operational voltage   | 230 VAC                      |
| Rated operational current   | 105 mA                       |
| Rated inrush current        | 7A                           |
| Protection class            | Protection class 2           |
| Pollution degree            | 3                            |
| Overvoltage category        | II                           |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V     |

| ACUSTICAL DATA                |                |
|-------------------------------|----------------|
| Volume/dB(max) at 1m distance | 110,0 dB dB(A) |
| Acoustic signal image         | Multi-tone     |
| Number of tones               | 10 tone        |
| Audio frequency               | 3300 Hz        |

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / EvoSIGNAL  
**Midi Sounder 115-230VAC GY**

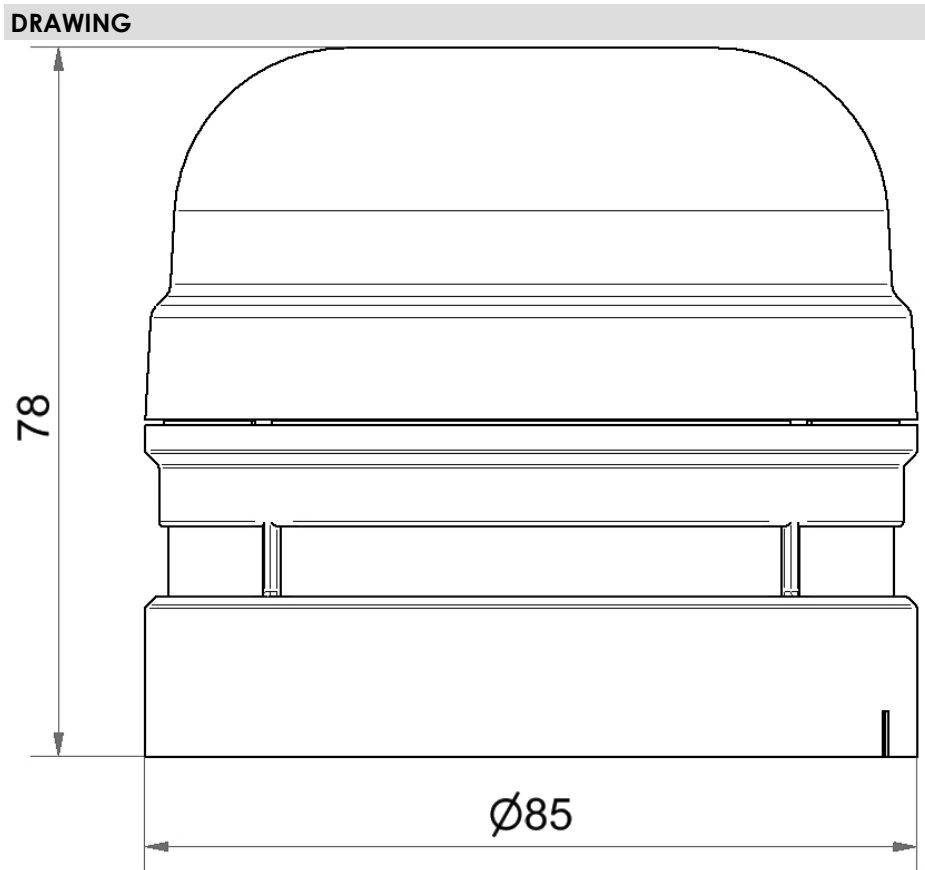

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.