

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 24VDC RD

Part No.: 580.152.55



MECHANICAL DATA	
Length	77 mm
Width	70 mm
Height	251 mm
Diameter	70 mm
Materials	PC PC/ABS
Dome colour	Red
Housing colour	Grey
Protection category	IP33
Connection	Screw terminals
cross-sectional area maximum	2,50mm ² / 14AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Type of fixing	Wall mounting
Service life optical	Lamp: depends on bulb
Acoustic service life	300 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	306 g
Product weight	253 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	320 mA
Rated inrush current	<5A
Protection class	Protection class 3
Pollution degree	2
Request to external PSU	SELV/PELV


OPTICAL DATA	
Light colour	Red

ACUSTICAL DATA	
Volume/dB(max) at 1m distance	92,0 dB dB(A)
Acoustic signal image	Continuous tone
Audio frequency	600 Hz

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 24VDC RD

DRAWING

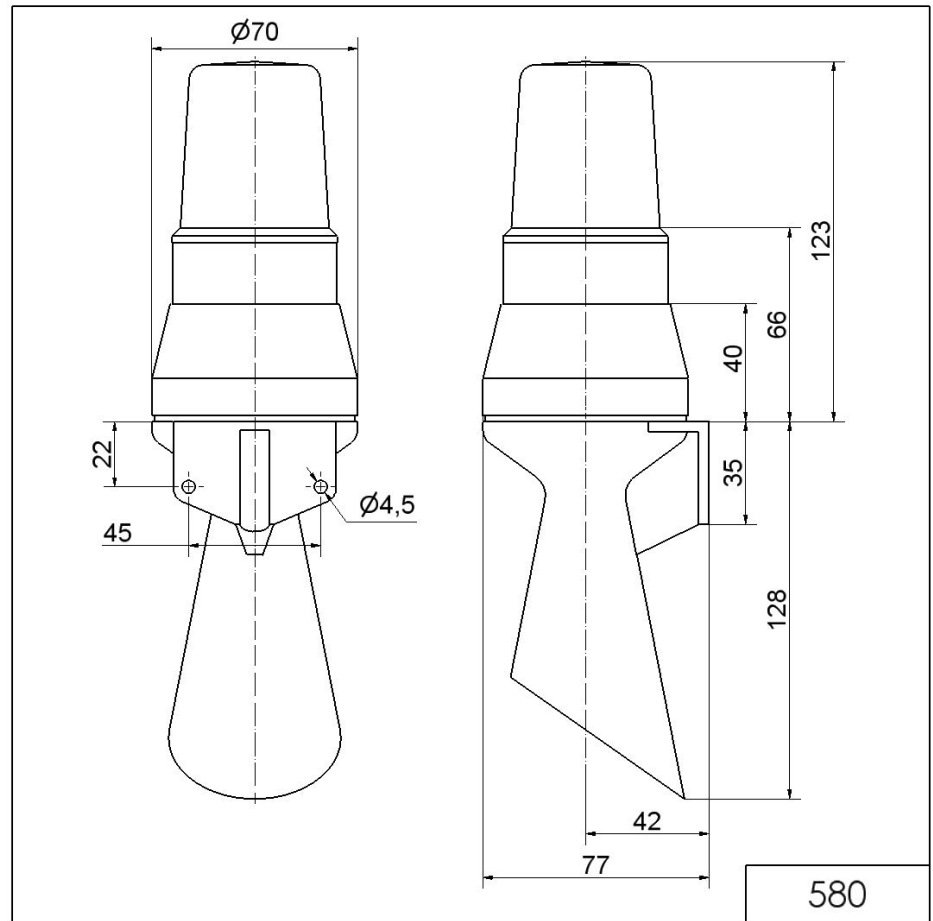

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.