

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 24VDC YE



Part No.: 580.352.55




MECHANICAL DATA	
Length	77 mm
Width	70 mm
Height	251 mm
Diameter	70 mm
Materials	PC PC/ABS
Dome colour	Yellow
Housing colour	Grey
Protection category	IP33
Connection	Screw terminals
cross-sectional area maximum	2,50mm ² / 14AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Type of fixing	Wall mounting
Service life optical	Lamp: depends on bulb
Acoustic service life	300 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	310 g
Product weight	260 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	320 mA
Rated inrush current	<5A
Protection class	Protection class 3
Pollution degree	2
Request to external PSU	SELV/PELV
OPTICAL DATA	
Light colour	Yellow
ACUSTICAL DATA	
Volume/dB(max) at 1m distance	92,0 dB dB(A)
Acoustic signal image	Continuous tone
Audio frequency	600 Hz



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mounting Model / Horn/Light Combination 580
Horn/Light WM Contin. tone 24VDC YE

DRAWING

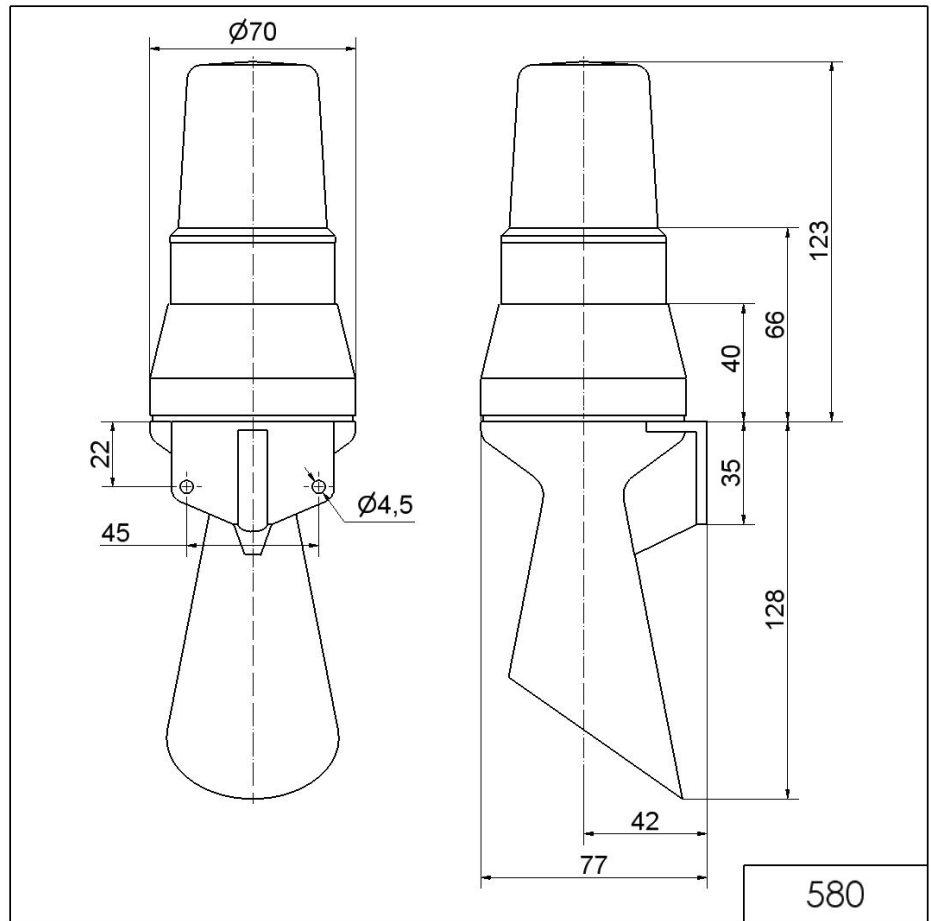

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.