Permanent Light 895 / LED Bulb LED Bulb E27 115VAC RD



i

Part No.: 956.120.67




ECHANICAL DATA bight ameter eight with packaging oduct weight ECTRICAL DATA parating voltage	65 mm 45 mm 36 g 28 g 115V
ameter eight with packaging oduct weight ECTRICAL DATA	45 mm 36 g 28 g
eight with packaging oduct weight ECTRICAL DATA	36 g 28 g
oduct weight ECTRICAL DATA	28 g
ECTRICAL DATA	
	115V
oorating voltago	115V
perating voltage	
perating voltage type	AC
perating voltage frequency	60Hz
perating voltage tolerance	+/- 10%
ated operational voltage	115 VAC
ated operational current	30 mA
PTICAL DATA	
ght source	LED
ght colour	Red
ervice life optical	100,000 h maximum
Imp fitting/socket	E27
PPROVAL DATA	
onforms with CE	Yes
EEE	No
onforms with RED directive	No
onforms with ATEX-directive	No
onforms with CCC	No
onforms with FCC	No
onforms with IC	No
AC certificate available	No
onforms with AS-I	No
AO Certification	No
onforms with DNV	No
onforms with RoHS CN	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Permanent Light 895 / LED Bulb LED Bulb E27 115VAC RD

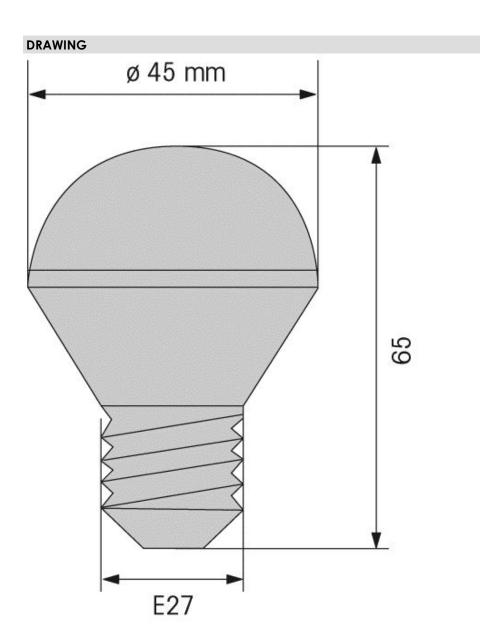

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.