

Modular Signal Towers / KombiSIGN 72  
**Siren element contin/altern. 230VAC BK**



<b>Part No.:</b>	<b>645.870.68</b>
<b>Series:</b>	<b>KombiSIGN 71</b>



**MECHANICAL DATA**

Height	54 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	89 g
Product weight	75 g

**ELECTRICAL DATA**

Operating voltage	230V
Operating voltage type	AC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	60 mA
Rated inrush current	3 A
Protection class	Protection class 2
Pollution degree	3
Overtoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

**ACUSTICAL DATA**

Volume (max) at 1m distance	105,0 dB (A)
Acoustic signal image	Alternating tone Continuous tone
Number of tones	2 tone
Volume adjustable	Switch
Volume adjustment range	ca 95 / 105 dB (A)
Audio frequency	3000 Hz
Acoustic service life	5,000 h minimum

**APPROVAL DATA**

Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conforms with ATEX-directive	No
Conforms with CCC	No


**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72

**Siren element contin/altern. 230VAC BK**

Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

**DRAWING**

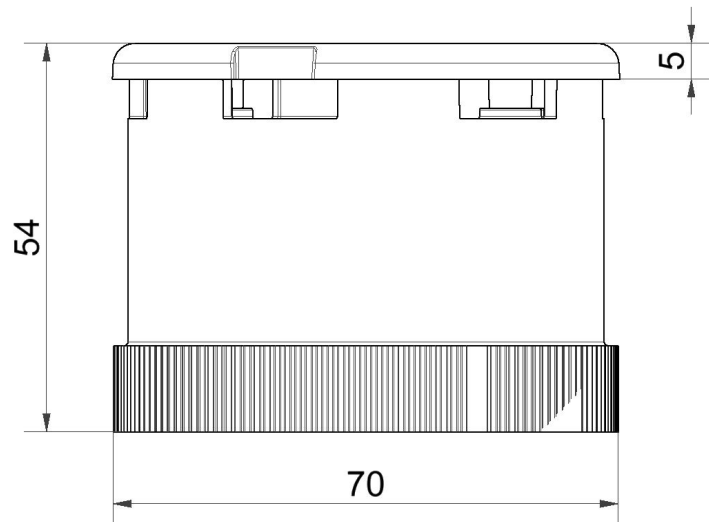

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.