

KombiSIGN 40 / DesignLOOK

Siren element 8 tne 24VAC/DC GY

Part No.:	635.710.75
Series:	KombiSIGN 40

**MECHANICAL DATA**

Height	68 mm
Diameter	40 mm
Materials	PC
Housing colour	Grey
Protection category	IP66 IP69K
Service life optical	500 h minimum
Acoustic service life	500 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	47 g
Product weight	38 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	200 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

ACUSTICAL DATA

Volume/dB(max) at 1m distance	95,0 dB dB(A)
Acoustic signal image	Multi-tone
Number of tones	8 tone
Volume adjustable	Switch
Volume adjustment range	89 - 95 DB




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / DesignLOOK

Siren element 8 tne 24VAC/DC GY

DRAWING

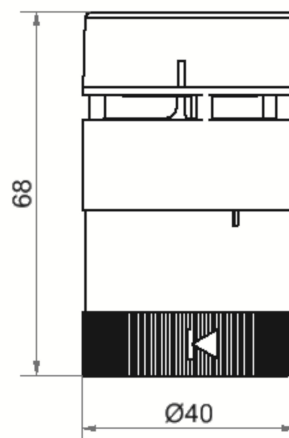

635.X10.75



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.