

KombiSIGN 40 / ClassicLOOK

Siren element contin/pulse 24VAC/DC BK



Part No.:	635.800.75
Series:	KombiSIGN 40



MECHANICAL DATA	
Height	45 mm
Diameter	40 mm
Materials	PC
Housing colour	Black
Protection category	IP66 IP69K
Service life optical	5,000 h minimum
Acoustic service life	5,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	35 g
Product weight	25 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	80 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV


ACUSTICAL DATA	
Volume/dB(max) at 1m distance	85,0 dB dB(A)
Acoustic signal image	Continuous tone Pulse tone
Audio frequency	2900 Hz

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

Siren element contin/pulse 24VAC/DC BK

DRAWING

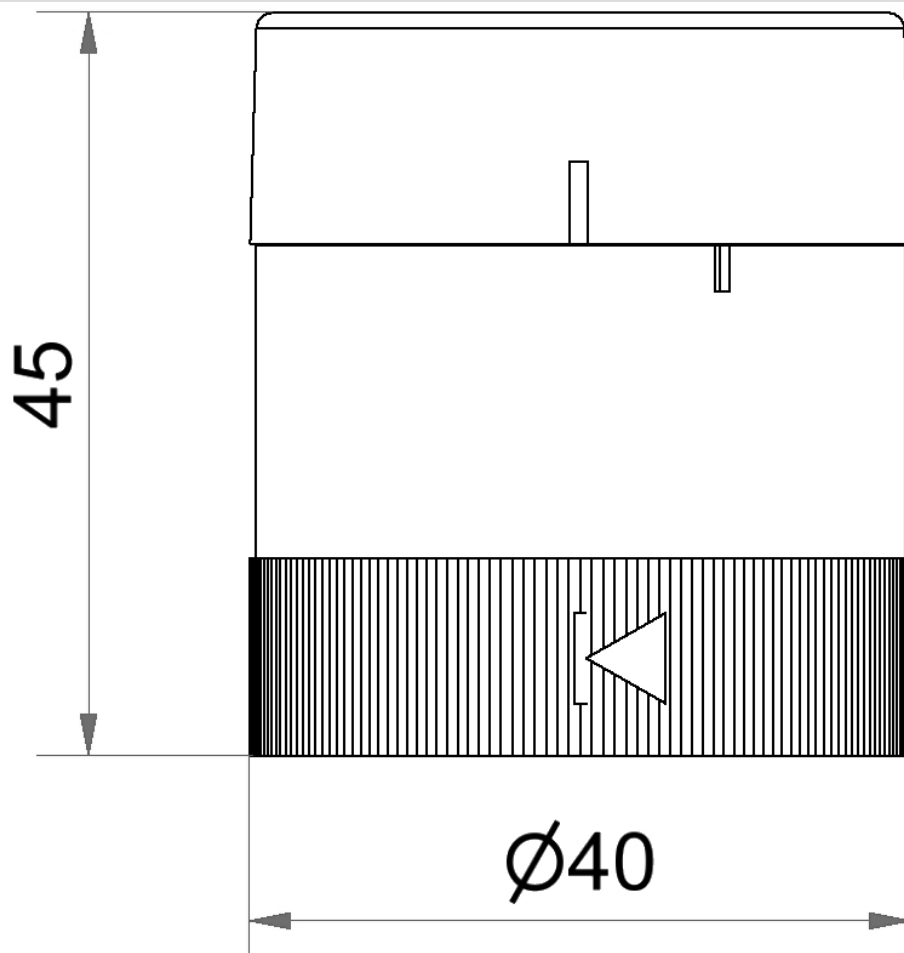

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.