

KombiSIGN 40 / ClassicLOOK

## Siren element 8 tne 24VAC/DC BK



Part No.:	635.810.75
Series:	KombiSIGN 40



### MECHANICAL DATA

Height	68 mm
Diameter	40 mm
Materials	PC
Housing colour	Black
Protection category	IP66 IP69K
Service life optical	500 h minimum
Acoustic service life	500 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
UL Type Rating	Type 12
Weight with packaging	48 g
Product weight	38 g

### ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	200 mA
Rated inrush current	500 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

### ACUSTICAL DATA

Volume/dB(max) at 1m distance	95,0 dB dB(A)
Acoustic signal image	Multi-tone
Number of tones	8 tone
Volume adjustable	Switch
Volume adjustment range	89 - 95 DB




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**Siren element 8 tne 24VAC/DC BK**

**DRAWING**

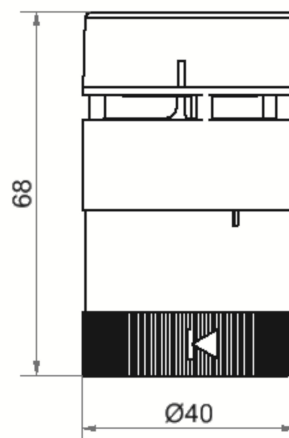

**635.X10.75**



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.