

KombiSIGN 71 / WIN

WIN transmitter KombiSIGN 71 24VAC/DC BK

Part No.: 860.640.05

**MECHANICAL DATA**

| | |
|-----------------------------|------------------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | USB |
| Service life optical | 50,000 h maximum |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| UL Type Rating | Type 12 |
| Weight with packaging | 119 g |
| Product weight | 100 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage type | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 40 mA |
| Rated inrush current | 430 mA |
| Protection class | Protection class 2 |
| Pollution degree | 2 |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / WIN

WIN transmitter KombiSIGN 71 24VAC/DC BK

DRAWING

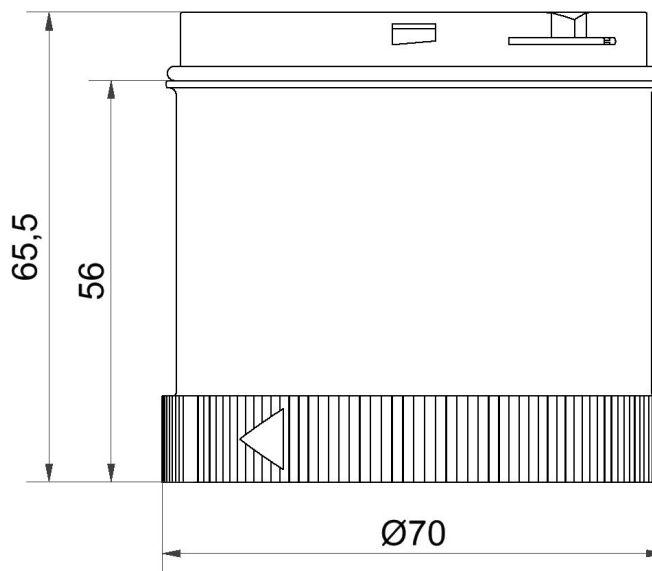

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.