

KombiSIGN 71 / WIN

**KombiSIGN 71 reflect 24V BK**



Part No.:	861.640.01
Series:	KombiSIGN 71



MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Tension relief	Not present
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	213 g
Product weight	178 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	900 mA
Rated inrush current	430 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	SELV/PELV




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / WIN

**KombiSIGN 71 reflect 24V BK**

**DRAWING**

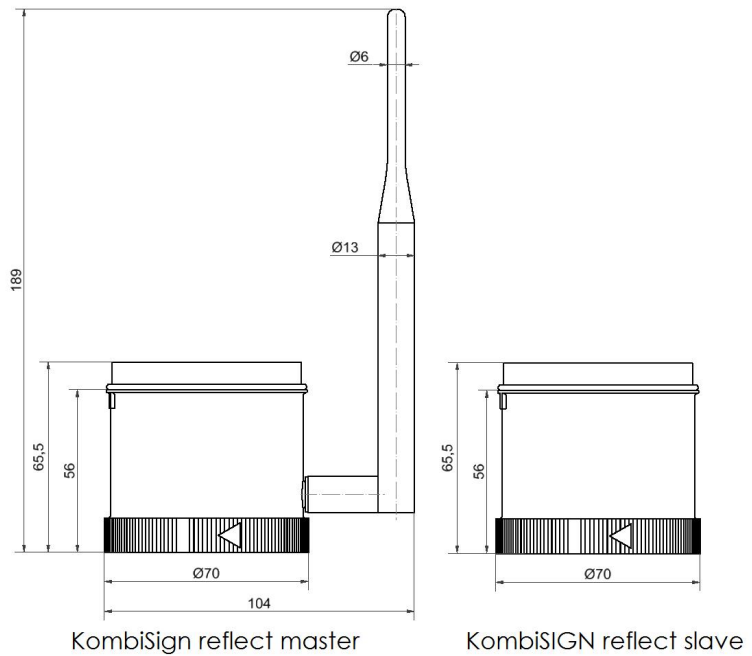

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.