

Completely pre-assembled Signal Towers / KOMPAKT 37  
**K37 plug EM Pulse tone 24VAC/DC GN/YE/RD**



|           |            |
|-----------|------------|
| Part No.: | 699.210.75 |
| Series:   | Kompakt 37 |



**MECHANICAL DATA**

|                             |                        |
|-----------------------------|------------------------|
| Height                      | 175 mm                 |
| Diameter                    | 38 mm                  |
| Materials                   | PC                     |
| Dome colour                 | Green<br>Red<br>Yellow |
| Housing colour              | Black                  |
| Protection category         | IP65                   |
| Connection                  | M12 plug 5-pole        |
| Cable entry                 | Membrane grommet       |
| Cable entry minimum         | d = 1 mm               |
| Cable entry maximum         | d = 9 mm               |
| Tension relief              | Pull-out protection    |
| Type of fixing              | Built-in mounting      |
| Service life optical        | 50,000 h maximum       |
| Acoustic service life       | 5,000 h minimum        |
| Working temperature minimum | -20°C                  |
| Working temperature maximum | +50°C                  |
| UL Type Rating              | Type 12<br>Type 4X     |
| Weight with packaging       | 134 g                  |
| Product weight              | 89 g                   |

**ELECTRICAL DATA**

|                             |                                |
|-----------------------------|--------------------------------|
| Operating voltage           | 24V                            |
| Operating voltage type      | AC/DC                          |
| Operating voltage type      | 50Hz                           |
| Operating voltage tolerance | +/- 10%                        |
| Rated operational voltage   | 24 VDC                         |
| Rated operational current   | 125 mA                         |
| Rated inrush current        | 500 mA                         |
| Protection class            | Protection class 2             |
| Pollution degree            | 3<br>In the connection area: 2 |

**OPTICAL DATA**

|              |                        |
|--------------|------------------------|
| Light source | LED                    |
| Light colour | Green<br>Red<br>Yellow |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37  
**K37 plug EM Pulse tone 24VAC/DC GN/YE/RD**

|                      |           |
|----------------------|-----------|
| Optical signal image | Permanent |
|----------------------|-----------|

| ACUSTICAL DATA                |               |
|-------------------------------|---------------|
| Volume/dB(max) at 1m distance | 85,0 dB dB(A) |
| Acoustic signal image         | Pulse tone    |
| Audio frequency               | 2900 Hz       |

**DRAWING**

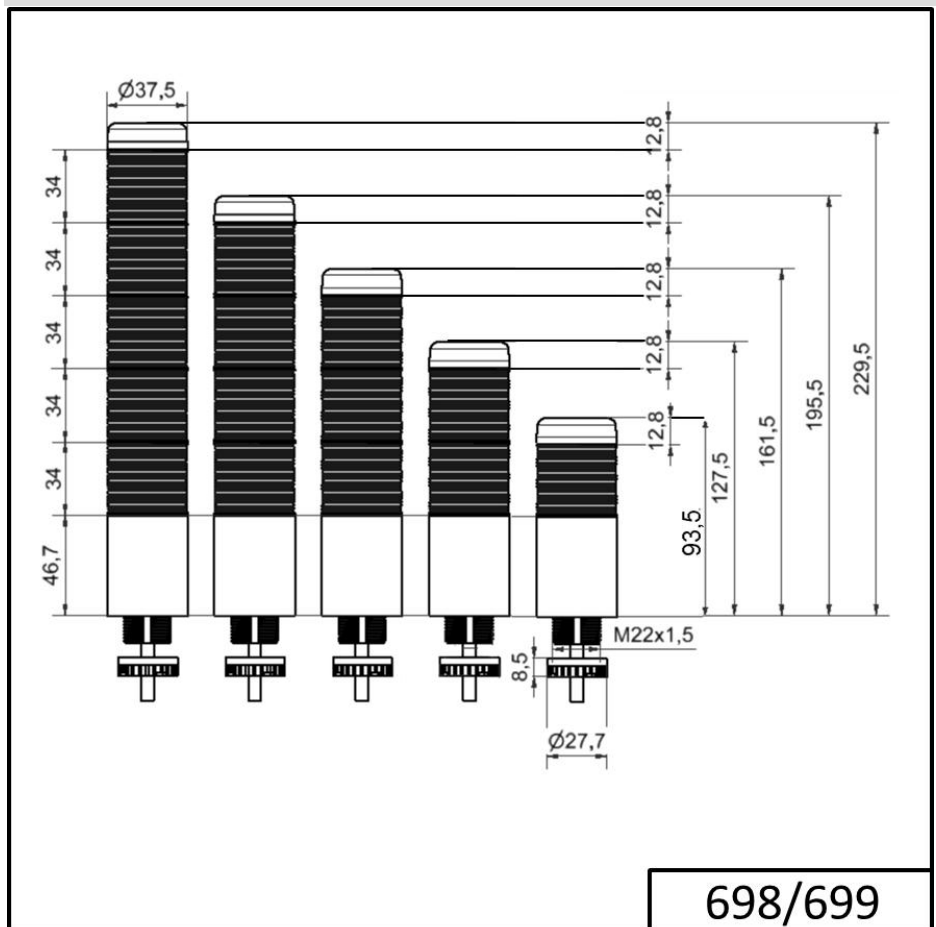

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.