

(€ RoHS c∰us

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC GN/RD

Series:

Part No.: 699.220.75

Kompakt 37



i

MECHANICAL DATA	
Height	141 mm
Diameter	38 mm
Materials	PC
Dome colour	Green Red
Housing colour	Black
Protection category	IP65
Connection	M12 plug 5-pole
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Service life optical	50,000 h maximum
Acoustic service life	5,000 h minimum
Working temperature minimum	-20°C
Working temperature maximum	+50°C
UL Type Rating	Type 12 Type 4X
Weight with packaging	117 g
Product weight	76 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage type	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	95 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3 In the connection area: 2
OPTICAL DATA	
Light source	LED
Light colour	Green Red
Optical signal image	Permanent

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


i

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC GN/RD

ACUSTICAL DATA	
Volume/dB(max) at 1m distance	85,0 dB dB(A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz

DRAWING

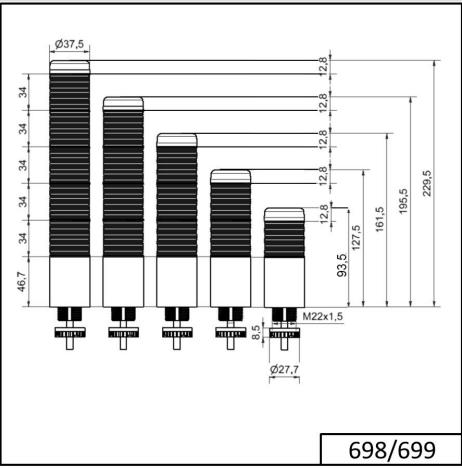

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.